

Project:

Date:


PRODUCT DATASHEET

Last information update: January 2021


series:

CUBE PRO MINI

FLOODLIGHT SPOT
3W 160LM ON/OFF

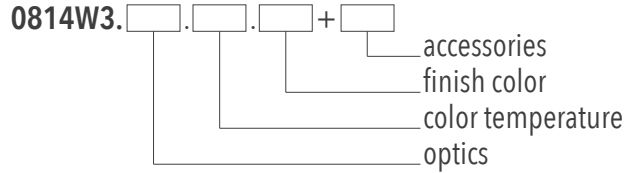

Example of complete order code: 0814W3.0004.2780.03+A1

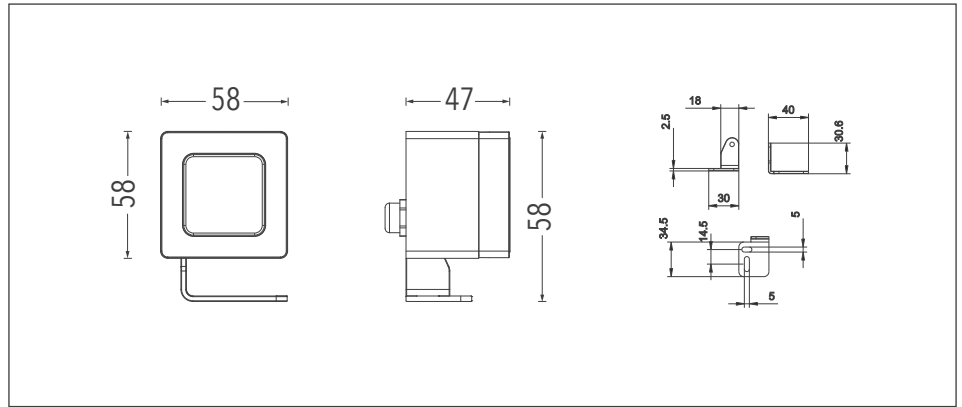

Description

LED floodlight for outdoor installation, small size with a bracket that available in adjustability 100°. Body is made of powder coated die-cast aluminum, lens is made of polycarbonate, and all external screws used are made of stainless steel, the luminaire with a high level of weather and UV ray resistance. Symmetrical light distribution, spot optics. Light color white, On/off controllable. The power supply is not provided and is to be ordered separately. Optical accessories and installation accessories can be provided for improving performance.

Installation

Surface mounted by adjustable bracket, such as wall, ceiling, floor etc.

Luminaire weight

0.28 Kg

Optics



4°
[0004]

Color temperature


| | | |
|----------|----------|----------|
| 2700K | 3000K | 4000K |
| [2780] | [3080] | [4080] |

Finish color

| | |
|--------|------------|
| Black | Customized |
| [03] | [RAL] |

TECHNICAL DATA

| | |
|-------------------------|-------------------------------------------------------------------|
| Power | 3W |
| Input voltage | 24V DC |
| Safety class | III |
| Luminous flux | 160 lm \pm 5% |
| CCT | 2700K, 3000K, 4000K |
| CRI | 80 Ra |
| Light distribution type | Symmetrical |
| Optics | 4° |
| Light source | Cree |
| MacAdam Step | 5 |
| Number of LEDs | 1 |
| Power supply | Not included (constant voltage power supply ordered separately) |
| Controllable | ON/OFF |
| IP rating | IP66 |
| Impact resistance | IK07 |
| Ambient temperature | -20°C ~ +50°C |
| Storage temperature | -40°C ~ +70°C |
| Material | Body in die-cast aluminum, optical lens in polycarbonate |
| Finish | Powder coated, black as standard color |
| Lifetime | 50,000 hours Ta=40°C |

WIRING

1x Power input cable, 2-core, open end, L=300mm

ACCESSORIES



Anti-glare visor

Code
0814A1



Anti-glare honeycomb louvre

Code
0814A2



U-shape bracket

Code
0814A3
