

Project:

Date:

PRODUCT DATASHEET

Last information update: January 2021

series:

CUBE PRO MINI


FLOODLIGHT

6W 480LM ON/OFF

0814W6. . . . +
accessories
finish color
color temperature
optics



Example of complete order code: 0814W6.0007.2780.03+A1

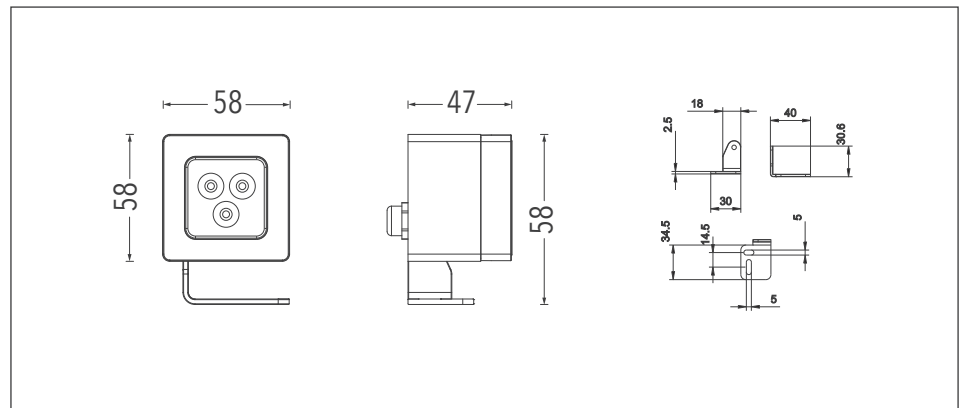

Description

LED floodlight for outdoor installation, small size with a bracket that available in adjustability 100°. Body is made of powder coated die-cast aluminum, lens is made of polycarbonate, and all external screws used are made of stainless steel, the luminaire with a high level of weather and UV ray resistance. Symmetrical light distribution, spot / narrow / medium optics. Light color white, On/off controllable. The power supply is not provided and is to be ordered separately. Optical accessories and installation accessories can be provided for improving performance.


Installation

Surface mounted by adjustable bracket, such as wall, ceiling, floor etc.

Luminaire weight

0.30 Kg

Optics

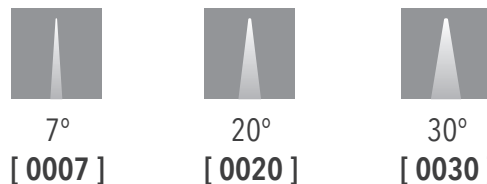

7°
[0007]

20°
[0020]

30°
[0030]

Color temperature

2700K
[2780]

3000K
[3080]

4000K
[4080]


Finish color

Black
[03]

Customized
[RAL]

TECHNICAL DATA

Power	6W
Input voltage	24V DC
Safety class	III
Luminous flux	480 lm \pm 5%
CCT	2700K, 3000K, 4000K
CRI	80 Ra
Light distribution type	Symmetrical
Optics	7°, 20°, 30°
Light source	Osram
MacAdam Step	5
Number of LEDs	3
Power supply	Not included (constant voltage power supply ordered separately)
Controllable	ON/OFF
IP rating	IP66
Impact resistance	IK07
Ambient temperature	-20°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Material	Body in die-cast aluminum, optical lens in polycarbonate
Finish	Powder coated, black as standard color
Lifetime	50,000 hours Ta=40°C

WIRING

1x Power input cable, 2-core, open end, L=300mm

ACCESSORIES



Anti-glare visor

Code
0814A1



Anti-glare honeycomb louvre

Code
0814A2



U-shape bracket

Code
0814A3
