

Project:

Date:

## PRODUCT DATASHEET

Last information update: January 2021

series:

### CUBE PRO MINI


FLOODLIGHT

8W 600LM ON/OFF

0814W8. . . . + . . . .  
accessories  
finish color  
color temperature  
optics



Example of complete order code: 0814W8.0008.2780.03+A1

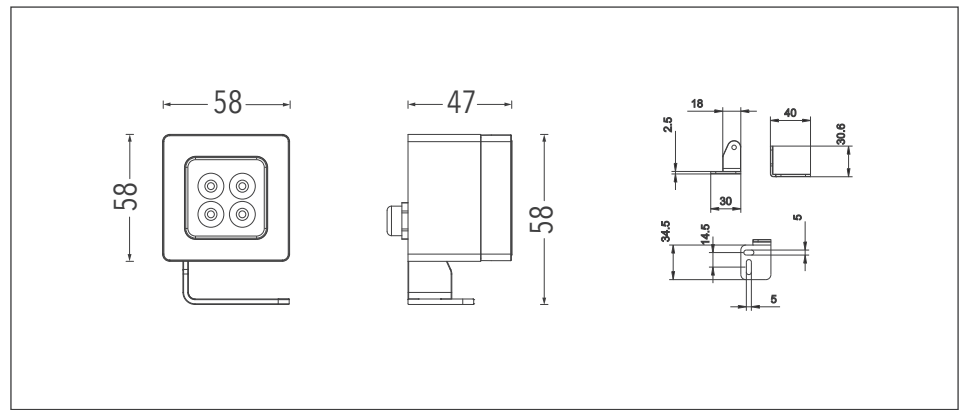

#### Description

LED floodlight for outdoor installation, small size with a bracket that available in adjustability 100°. Body is made of powder coated die-cast aluminum, lens is made of polycarbonate, and all external screws used are made of stainless steel, the luminaire with a high level of weather and UV ray resistance. Symmetrical light distribution, spot / narrow / medium / oval optics. Light color white, On/off controllable. The power supply is not provided and is to be ordered separately. Optical accessories and installation accessories can be provided for improving performance.


#### Installation

Surface mounted by adjustable bracket, such as wall, ceiling, floor etc.

#### Luminaire weight

0.30 Kg

#### Optics

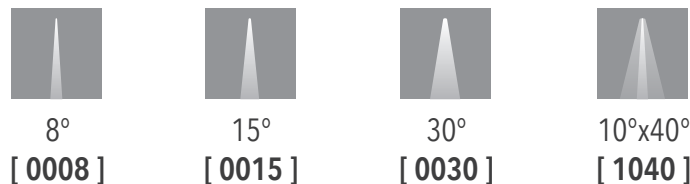

#### Color temperature


2700K	3000K	4000K
[ 2780 ]	[ 3080 ]	[ 4080 ]

#### Finish color

Black	Customized
[ 03 ]	[ RAL ]

**TECHNICAL DATA**

Power	8W
Input voltage	24V DC
Safety class	III
Luminous flux	600 lm $\pm$ 5%
CCT	2700K, 3000K, 4000K
CRI	80 Ra
Light distribution type	Symmetrical
Optics	8°, 15°, 30°, 10°x40°
Light source	Osram
MacAdam Step	5
Number of LEDs	4
Power supply	Not included ( constant voltage power supply ordered separately )
Controllable	ON/OFF
IP rating	IP66
Impact resistance	IK07
Ambient temperature	-20°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Material	Body in die-cast aluminum, optical lens in polycarbonate
Finish	Powder coated, black as standard color
Lifetime	50,000 hours Ta=40°C

**WIRING**

1x Power input cable, 2-core, open end, L=300mm

---

**ACCESSORIES**



Anti-glare visor

Code  
**0814A1**



Anti-glare honeycomb louvre

Code  
**0814A2**



U-shape bracket

Code  
**0814A3**

---