

Project:

Date:


# PRODUCT DATASHEET

Last information update: January 2021



series:

## YORK M

WALL WASHER 1000MM RGB  
36W 1600LM DMX512

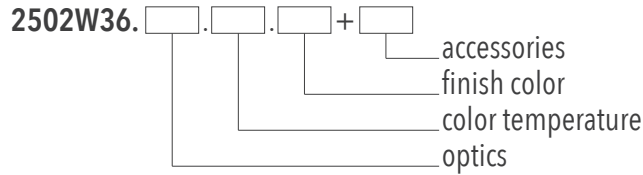

Example of complete order code: 2502W36.0007.RGB.01+A1

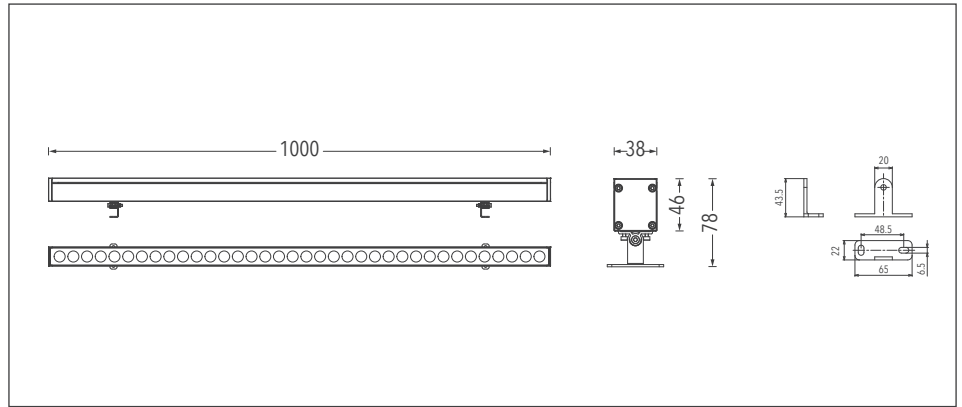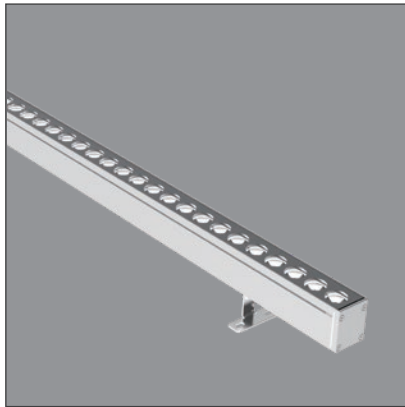

### Description

LED wall washing luminaire for outdoor installation, with a bracket that available in adjustability 180°. Body is made of extruded aluminum, safety cover is made of tempered glass, lens is made of PMMA, and all external screws used are made of stainless steel, the luminaire with a high level of weather and UV ray resistance. Symmetrical light distribution, spot / narrow / medium / flood / wide flood / oval optics. Light color RGB, DMX512 control. The power supply is not provided and is to be ordered separately. Safety class III. Anti-glare accessories for improving visual comfort.


### Installation

Wall surface mounted by adjustable bracket.

### Luminaire weight

1.9 Kg

### Optics

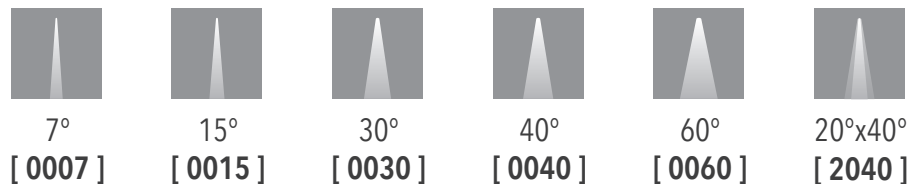

### Color temperature

RGB  
[ RGB ]


### Finish color

Silver	Black	Customized
[ 01 ]	[ 03 ]	[ RAL ]

**TECHNICAL DATA**

<b>Power</b>	Max. 36W
<b>Input voltage</b>	24V DC
<b>Safety class</b>	III
<b>Luminous flux</b>	1600 lm ±5%
<b>CCT</b>	RGB
<b>CRI</b>	---
<b>Light distribution type</b>	Symmetrical
<b>Optics</b>	7°, 15°, 30°, 40°, 60°, 20°x40°
<b>Light source</b>	Osram
<b>MacAdam Step</b>	5
<b>Number of LEDs</b>	36
<b>Power supply</b>	Not included ( constant voltage power supply ordered separately )
<b>Control</b>	DMX512
<b>IP rating</b>	IP66
<b>Impact resistance</b>	IK07
<b>Ambient temperature</b>	-20°C ~ +50°C
<b>Storage temperature</b>	-40°C ~ +70°C
<b>Material</b>	Body in extruded aluminum, cover in tempered glass, optical lens in PMMA
<b>Finish</b>	Powder coated, silver / black as standard colors
<b>Lifetime</b>	50,000 hours Ta=40°C

**WIRING**

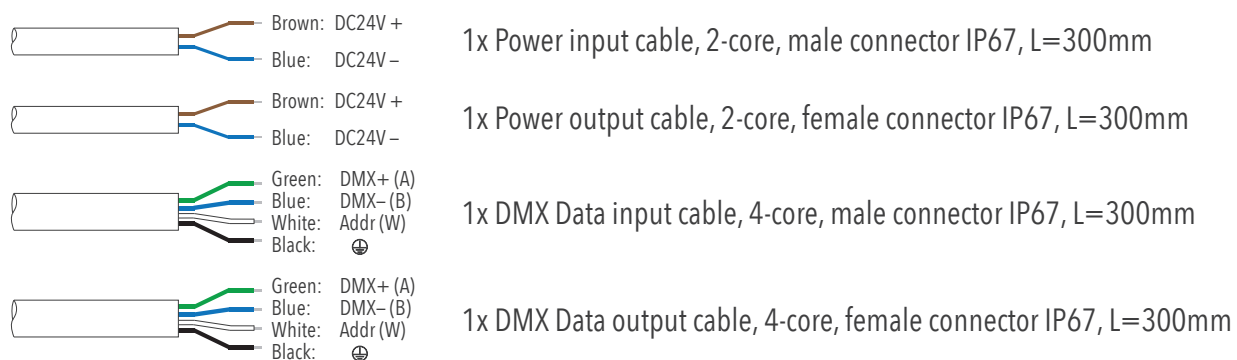

**ACCESSORIES**

---



Anti-glare visor

Code  
**2502A1**

---



Anti-glare grille

Code  
**2502A2**

---