

Project:

Date:


# PRODUCT DATASHEET

Last information update: January 2021


series:

## YORK L

WALL WASHER 1000MM RGB  
60W 2700LM DMX512

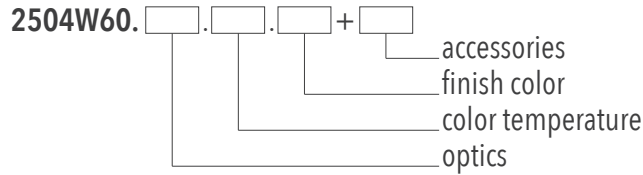

Example of complete order code: 2504W60.0007.RGB.01+A1

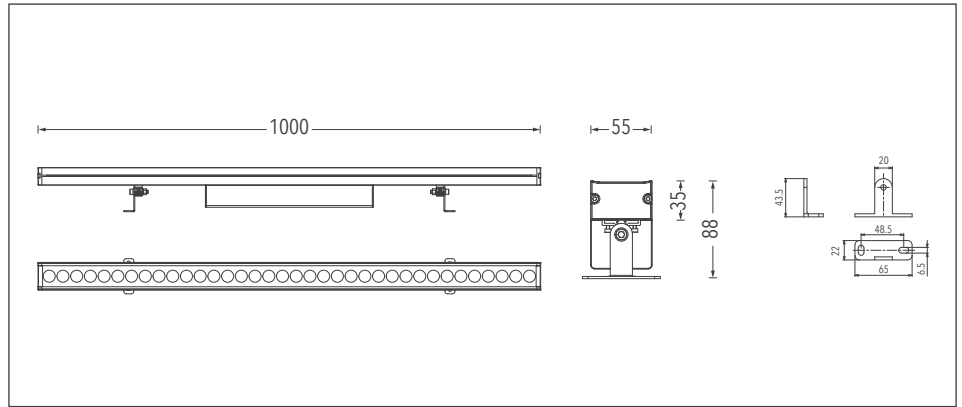

### Description

LED wall washing luminaire for outdoor installation, with a bracket that available in adjustability 180°. Body is made of extruded aluminum, safety cover is made of tempered glass, lens is made of PMMA, and all external screws used are made of stainless steel, the luminaire with a high level of weather and UV ray resistance. Symmetrical light distribution, spot / narrow / medium / flood / wide flood / oval optics. Light color RGB, DMX512 control. Built-in power supply. Safety class I. Anti-glare accessories for improving visual comfort.


### Installation

Wall surface mounted by adjustable bracket.

### Luminaire weight

3.5 Kg

### Optics

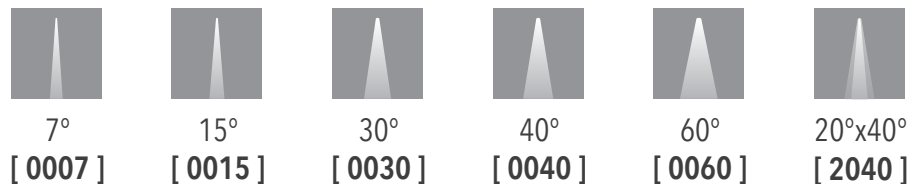

### Color temperature

RGB  
[ RGB ]


### Finish color

Silver	Black	Customized
[ 01 ]	[ 03 ]	[ RAL ]


**TECHNICAL DATA**

Power	Max. 60W
Input voltage	100-240V AC
Safety class	I
Luminous flux	2700 lm ±5%
CCT	RGB
CRI	---
Light distribution type	Symmetrical
Optics	7°, 15°, 30°, 40°, 60°, 20°x40°
Light source	Osram
MacAdam Step	5
Number of LEDs	36
Power supply	External power supply included
Control	DMX512
IP rating	IP66
Impact resistance	IK07
Ambient temperature	-20°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Material	Body in extruded aluminum, cover in tempered glass, optical lens in PMMA
Finish	Powder coated, silver / black as standard colors
Lifetime	50,000 hours Ta=40°C


**WIRING**



1x Power input cable, 3-core, open end, L=300mm

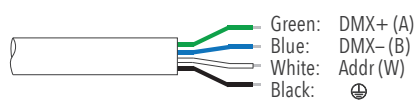

1x DMX Data input cable, 4-core, male connector IP67, L=300mm

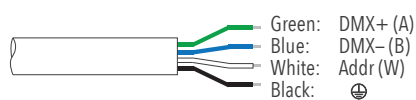

1x DMX Data output cable, 4-core, female connector IP67, L=300mm

**ACCESSORIES**


---



Anti-glare visor

Code  
**2504A1**

---



Anti-glare grille

Code  
**2504A2**

---