

Project:

Date:

## PRODUCT DATASHEET

Last information update: January 2021

series:


### CUBE PRO MINI

FLOODLIGHT RGB  
6W 180LM DMX512

0814W6. . . . +  
accessories  
finish color  
color temperature  
optics



Example of complete order code: 0814W6.0007.RGB.03+A1

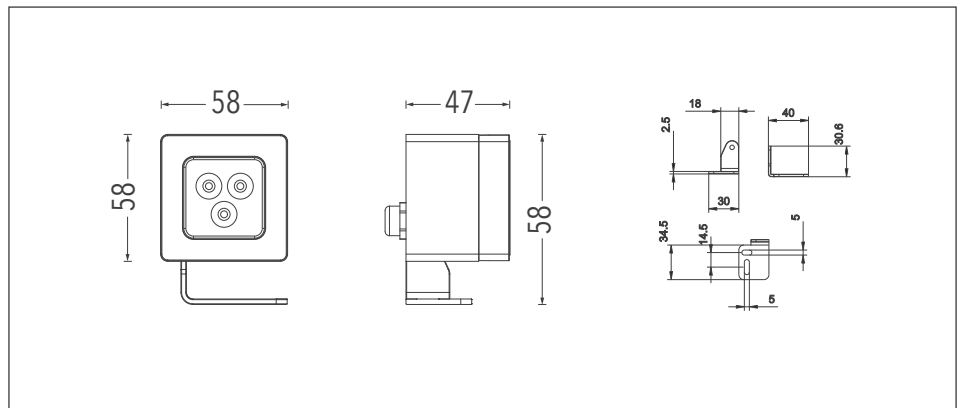

#### Description

LED floodlight for outdoor installation, small size with a bracket that available in adjustability 100°. Body is made of powder coated die-cast aluminum, lens is made of polycarbonate, and all external screws used are made of stainless steel, the luminaire with a high level of weather and UV ray resistance. Symmetrical light distribution, spot / narrow / medium optics. Light color RGB, DMX512 controllable. The power supply is not provided and is to be ordered separately. Optical accessories and installation accessories can be provided for improving performance.


#### Installation

Surface mounted by adjustable bracket, such as wall, ceiling, floor etc.

#### Luminaire weight

0.30 Kg

#### Optics

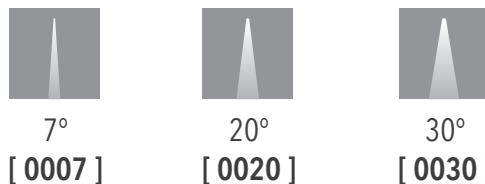

#### Color temperature

RGB  
[ RGB ]


#### Finish color

Black  
[ 03 ]      Customized  
[ RAL ]


**TECHNICAL DATA**

Power	Max. 6W
Input voltage	24V DC
Safety class	III
Luminous flux	180 lm ±5%
CCT	RGB
CRI	---
Light distribution type	Symmetrical
Optics	7°, 20°, 30°
Light source	Osram
MacAdam Step	5
Number of LEDs	3
Power supply	Not included ( constant voltage power supply ordered separately )
Controllable	DMX512
IP rating	IP66
Impact resistance	IK07
Ambient temperature	-20°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Material	Body in die-cast aluminum, optical lens in polycarbonate
Finish	Powder coated, black as standard color
Lifetime	50,000 hours Ta=40°C

**WIRING**

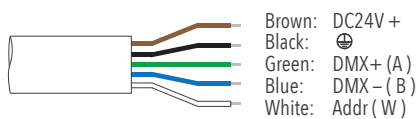

1x Power / DMX Data input cable, 5-core, connector, L=300mm

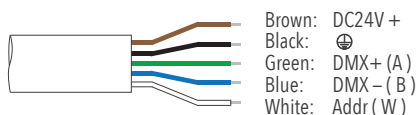

1x Power / DMX Data output cable, 5-core, connector, L=300mm

---

**ACCESSORIES**

---



Anti-glare visor

Code  
**0814A1**



Anti-glare honeycomb louvre

Code  
**0814A2**



U-shape bracket

Code  
**0814A3**

---